
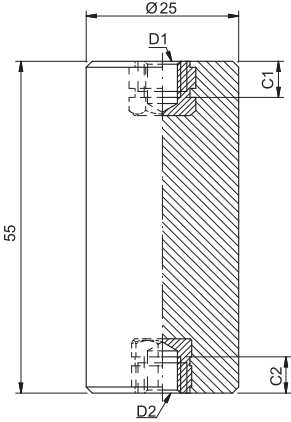


| Modelo / Model / Modelo | | AIPP 02/5 | | | | | |
|--|------|---|-------|------|------|-------|--|
| AFFORDABLE SOLUTIONS FOR L.V. APPLICATIONS B.M.C. / S.M.C. | |  | | | | | |
| Umáx. / Um / Umax. | (kV) | 0,75 | | | | | |
| Tensão Sup. / Pow. Freq. Volt. / Ens. Dielec. | (kV) | 7 | | | | | |
| Massa / Mass / Masa | (kg) | 0,055 | | | | | |
| Temp. Trab. / Work Temp. / Temp. Trab. | (°C) | -20 até/ up to / hasta +75°C | | | | | |
| Cor / Color / Cor | | Laranja/Orange/Naranja RAL 2003 | | | | | |
| Flexão / Bending / Flexion | (N) | (M6) > 1210 (Po) | | | | | |
| Insertos / Inserts / Insertos | D1 | C1 | T1 | D2 | C2 | T2 | |
| | | (mm) | (N.m) | | (mm) | (N.m) | |
| | M6 | 6 | 3 | M6 | 6 | 3 | |
| | 1/4" | 6 | 3 | 1/4" | 6 | 3 | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| Dimensões / Dimensions / Dimensiones | (mm) |  | | | | | |